


MMI-KS Doppelmuffe

MMI-KS Double socket

FRISCHHUT

MMI-KS Doppelmuffe mit Innengewindestutzen · DIN-EN 12842

MMI-KS Double socket with internal threaded branch · DIN-EN 12842

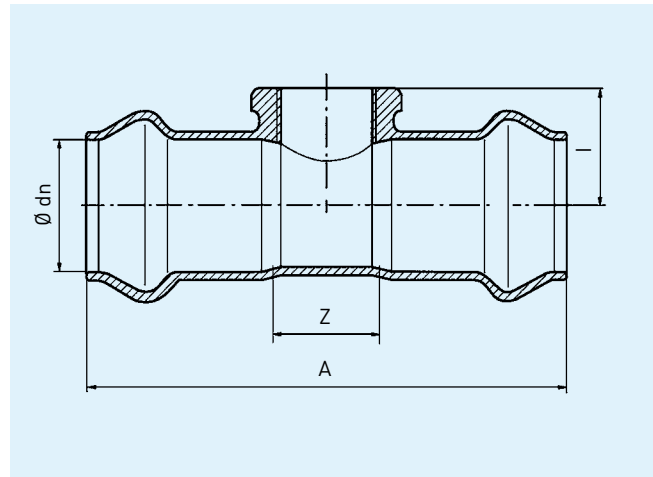

Maße in mm · dimensions in mm					kg/Stück kg/piece
DN	dn	Z	A	I	
50/2"	63	68	255	59	4,1
65/2"	75	71	270	64	5,4
80/2"	90	74	290	81	6,5
100/2"	110	79	315	90	9,4
125/2"	140	85	340	104	13,3
150/2"	160	91	365	113	16,0
200/2"	225	103	425	152	25,7
250/2"	280	115	480	177	43,4
300/2"	315	127	570	195	61,2

Werkstoff: duktiles Gusseisen
Normalausführung: EWS beschichtet

Material: ductile cast iron
Standard: EWS (fusion bonded epoxy) coating