


MMK-KS 45° Doppelmuffenkrümmer · DIN-EN 12842

MMK-KS 45° Double socket bend · DIN-EN 12842

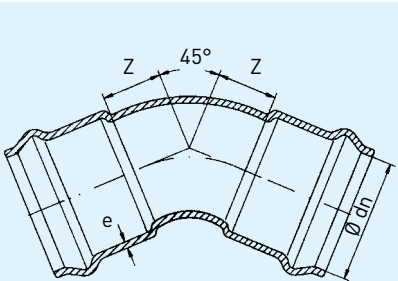

Maße in mm · dimensions in mm			kg/Stück kg/piece
DN	Ø dn	Z	
50	63	40	3,3
65	75	40	3,8
80	90	50	6,7
100	110	61	8,9
125	125	70	7,8
125	140	76	9,3
150	160	74	12,3
200	200	70	17,1
200	225	88	24,9
250	250	110	35,5
250	280	130	39,7
300	315	135	58,2
400	400	175	89,2
400	450	200	96,3


Werkstoff: duktiles Gusseisen
Normalausführung: EWS beschichtet

Material: ductile cast iron
Standard: EWS (fusion bonded epoxy) coating

MMQ-KS

MMQ-KS Doppelmuffenbogen 90° · DIN-EN 12842

MMQ-KS Double socket elbow 90° · DIN-EN 12842

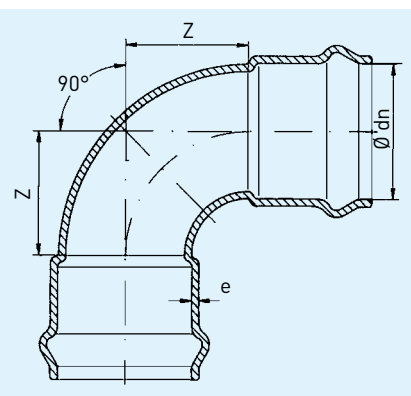

Maße in mm · dimensions in mm			kg/Stück kg/piece
DN	Ø dn	Z	
50	63	93	3,6
65	75	86	4,4
80	90	84	5,5
100	110	94	7,2
125	125	127	10,2
125	140	136	11,4
150	160	167	15,2
200	200	154	22,5
200	225	166	30,1
250	250	187	41,4
250	280	200	47,9
300	315	217	66,0
400	400	293	110,0
400	450	308	121,8

Werkstoff: duktiles Gusseisen
Normalausführung: EWS beschichtet

Material: ductile cast iron
Standard: EWS (fusion bonded epoxy) coating