


EU-Stücke mit TYTON®-Muffen PN 10/16, Flanschmuffenstücke nach DIN 28 603; DIN EN 545 Serie A
 Flanged socket with TYTON®-socket PN 10/16, according to DIN 28 603; DIN EN 545 series A

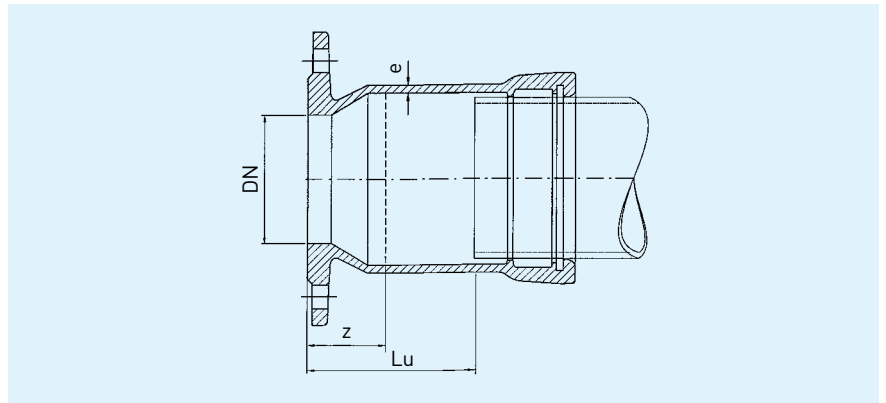

Maße in mm · dimensions in mm					kg/Stück kg/piece
DN	Lu	z	Ausgleichslänge compensating length	e	
80	130	43	± 40	7,0	6,8
100	130	45	± 40	7,2	8,8
125	135	37	± 40	7,5	13,3
150	135	40	± 40	7,8	16,0
200	140	39	± 40	8,4	18,6
250	145	40	± 40	9,0	32,5
300	150	55	± 40	9,6	44,3
350	155	50	± 40	10,2	51,1
400	160	69	± 40	10,8	57,7
500	170	61	± 40	12,0	81,2
600	180	60	± 40	13,2	127,6
700	190	87	± 40	14,4	177,0
800	200	86	± 40	15,6	189,0
900	210	67	± 40	16,8	281,0
1000	220	92	± 40	18,0	340,0

Achtung! Bohrbilder ab DN 200 ändern sich bei Druckstufe PN 16!
 PN 25 und PN 40 auf Anfrage

Attention! At pressure stage PN 16 drilling changes from DN 200!
 PN 25 and PN 40 upon request