


Klappenverschluss (Froschklappe) PN 10; PN 16 auf Anfrage  
Flap valves, PN 10; PN 16 upon request

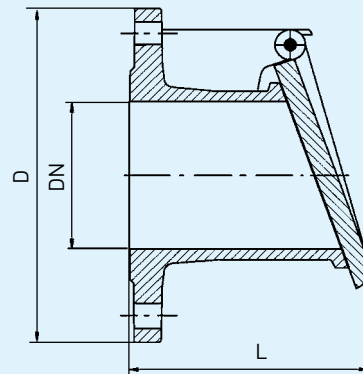

| Maße in mm - dimensions in mm |     |     | kg/Stück<br>kg/piece |
|-------------------------------|-----|-----|----------------------|
| DN                            | D   | L   |                      |
| 50                            | 165 | 100 | 5,0                  |
| 65                            | 185 | 110 | 6,0                  |
| 80                            | 200 | 120 | 8,0                  |
| 100                           | 220 | 125 | 10,0                 |
| 125                           | 250 | 135 | 13,0                 |
| 150                           | 285 | 146 | 17,0                 |
| 200                           | 340 | 150 | 25,0                 |
| 250                           | 400 | 180 | 42,0                 |
| 300                           | 445 | 185 | 54,0                 |
| 400                           | 565 | 280 | 72,5                 |
| 500                           | 670 | 280 | 109,0                |
| 600                           | 780 | 440 | 135,0                |

Flanschanschlussmaße nach DIN EN 1092-2

Werkstoff: GJS (GGG) innen und außen EWS beschichtet; Bolzen: X20Cr13; Dichtung: Gummi EPDM

Fehlende Größen auf Anfrage.

The measurements of the flanges are corresponding to DIN EN 1092-2

Material: GJS (GGG) EWS (fusion bonded epoxy) coating; Bolt: X20Cr13; Sealing: rubber EPDM

Missing sizes on request.