


MMA-KS-Losflansch

MMA-KS-loose flange

FRISCHHUT RANGE

MMA-KS-Losflansch Doppelmuffe mit Losflansch nach DIN EN 1092-2 Typ 16
Double socket tee with loose flanged branch conform DIN EN 1092-2 type 16

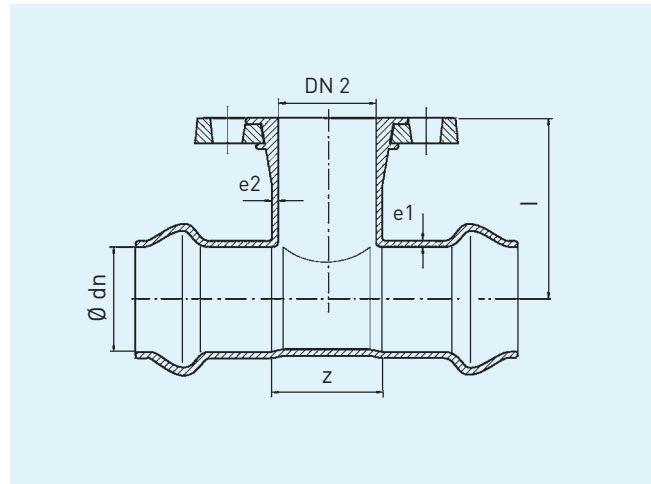

Maße in mm · dimensions in mm							kg/Stück kg/piece
DN	DN 2	Ø dn	l	z	e1	e2	
50	40	63	140	50	7,0	7,0	5,5
50	60	63	140	72	7,0	7,0	6,2
65	40	75	140	51	7,0	7,0	6,1
65	60	75	140	81	7,0	7,0	7,1
80	40	90	160	56	7,0	7,0	7,9
80	60	90	160	84	7,0	7,0	9,1
80	80	90	160	99	7,0	7,0	10,1
100	40	110	170	60	7,2	7,0	8,5
100	60	110	170	89	7,2	7,0	9,7
100	80	110	170	104	7,2	7,0	11,3
100	100	110	170	124	7,2	7,2	12,8
125	40	125	185	74	7,5	7,0	11,2
125	60	125	160	90	7,5	7,0	12,2
125	80	125	180	117	7,5	7,0	13,5
125	100	125	175	135	7,5	7,2	14,5
125	40	140	190	74	7,5	7,0	12,1
125	60	140	190	95	7,5	7,0	13,6
125	80	140	188	110	7,5	7,0	14,7
125	100	140	193	130	7,5	7,2	16,5
150	40	160	202	78	7,8	7,0	16,3
150	60	160	202	99	7,8	7,0	16,4
150	80	160	202	116	7,8	7,0	17,6
150	100	160	202	136	7,8	7,2	18,9
150	150	160	212	186	7,8	7,8	28,4
200	60	200	215	132	8,4	7,0	21,5
200	80	200	225	152	8,4	7,0	23,1
200	100	200	230	172	8,4	7,2	29,1
200	150	200	245	222	8,4	7,8	34,2
200	200	200	250	272	8,4	8,4	40,8

Werkstoff: Duktiles Gusseisen GJS (GGG)
Beschichtung: EWS-beschichtet nach RAL-GZ-662
DN 200 nur in Druckstufe PN 10 lieferbar

Material: Ductile cast iron GJS (GGG)
Coating: EWS-(fusion bonded epoxy) coated in accordance to RAL-GZ-662
DN 200 only available for pressure stage PN 10