


MK-Stücke 30° mit TYTON®-Muffe PN 10 - 40, FGR 70

Socket bend 30° / 1/12 with TYTON®-socket, PN 10 - 40, FGR 70

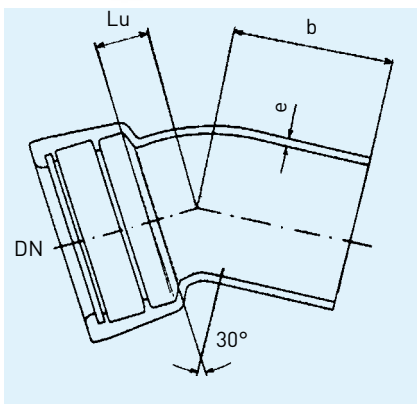


DN	Maße in mm - dimensions in mm			kg/Stück kg/piece
	b	Lu	e	
80	253	44	7,0	7,4
100	260	50	7,2	8,3
125	283	57	7,5	11,7
150	309	65	7,8	17,9
200	345	80	8,4	28,9
250	270	95	9,0	38,9
300	280	110	9,6	52,9
350	295	125	10,2	56,0
400	308	140	10,8	76,5
500	335	170	12,0	107,0
600	412	200	14,4	286,0

MK 45° TYTON

MK-Stücke 45° mit TYTON®-Muffe PN 10 - 40, FGR 70

Socket bend 45° / 1/8 with TYTON®-socket, PN 10 - 40, FGR 70

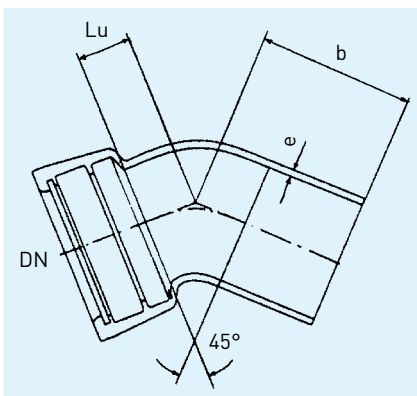

DN	Maße in mm - dimensions in mm			kg/Stück kg/piece
	b	Lu	e	
80	265	55	7,0	7,7
100	274	65	7,2	10,5
125	301	76	7,5	12,1
150	331	87	7,8	18,3
200	374	109	8,4	31,9
250	300	130	9,0	44,3
300	315	155	9,6	59,4
350	345	175	10,2	68,0
400	550	185	10,8	91,0
500	405	240	12,0	187,0
600	529	285	13,2	250,5