


Längskraftschlüssige Doppelmuffe für PE 80 / PE 100 Rohre mit Flanschstutzen
Fitting with integrated anchoring sockets for PE 80 / PE 100 pipes with flanged branch

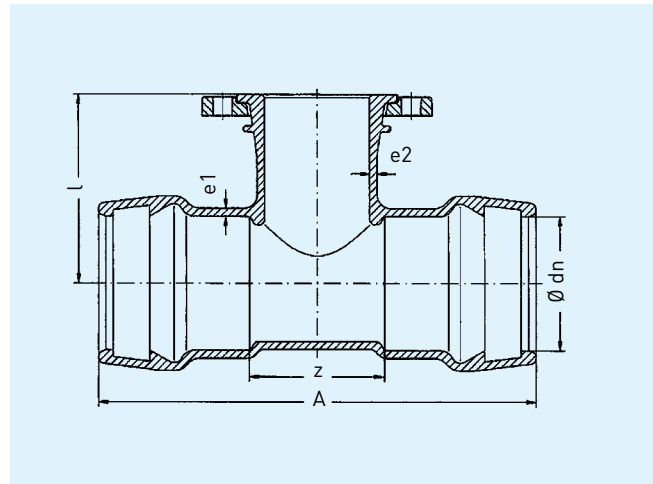

Maße in mm · dimensions in mm							kg/Stück kg/piece
DN	Ø dn	A	L	z	e1	e2	
80/ 80	90	359	160	101	7,0	7,0	11,3
100/ 80	110	376	170	105	7,2	7,0	13,6
100/100	110	396	170	125	7,2	7,2	14,8
100/ 80	125	397	170	107	7,5	7,0	15,8
100/100	125	417	180	127	7,5	7,2	17,6
150/ 80	160	432	200	106	7,8	7,0	21,9
150/100	160	452	205	116	7,8	7,2	23,1
150/150	160	502	220	176	7,8	7,8	28,4
150/ 80	180	453	225	105	8,4	7,0	22,0
150/100	180	480	230	125	8,4	7,2	17,8
200/ 80	225	484	225	124	8,4	7,0	28,6
200/100	225	504	230	144	8,4	7,2	30,9
200/200	225	598	260	238	8,4	8,4	43,6

Achtung! Losflansche ab DN 200 nur in Druckstufe PN 10 lieferbar

Attention! Looseflanges DN 200 and bigger only available for pressure stage PN 10