


MMB-KS DN 50 – 250

FRISCHHUT

MMB-KS Doppelmuffe mit Muffenstutzen · DIN-EN 12842
MMB-KS All socket tee · DIN-EN 12842

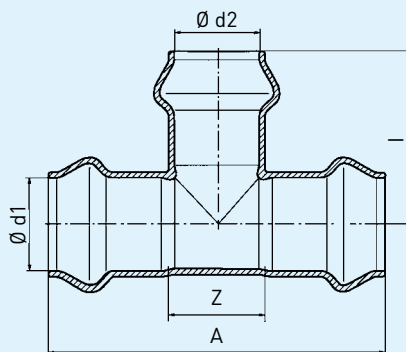

Maße in mm · dimensions in mm					kg/Stück kg/piece
DN	d1/d2	Z	A	I	
50/ 50	63/ 63	70	257	127	4,6
65/ 50	75/ 63	73	275	134	5,8
65/ 65	75/ 75	84	280	140	6,8
80/ 50	90/ 63	76	292	142	7,2
80/ 65	90/ 75	87	303	148	8,3
80/ 80	90/ 90	101	317	164	9,0
100/ 50	110/ 63	81	307	150	9,5
100/ 65	110/ 75	92	322	156	9,7
100/ 80	110/ 90	106	327	156	12,2
100/100	110/110	124	362	180	10,4
125/125	125/125	90	410	202	16,1
125/ 50	140/ 63	87	363	169	13,5
125/ 65	140/ 75	98	363	177	13,9
125/ 80	140/ 90	112	366	181	14,9
125/100	140/110	130	381	184	18,6
125/125	140/140	152	385	193	13,3
150/ 50	160/ 63	93	392	181	16,9
150/ 65	160/ 75	104	392	188	17,4
150/ 80	160/ 90	118	394	191	19,9
150/100	160/110	136	413	197	13,5
150/125	160/140	163	435	217	21,7
150/150	160/160	175	419	207	16,7
200/ 65	200/ 75	100	390	200	24,0
200/ 80	200/ 90	95	396	216	25,4
200/100	200/110	112	418	220	28,8
200/150	200/160	160	460	253	34,0
200/200	200/200	210	510	255	37,3
200/ 80	225/ 90	130	449	222	28,0
200/100	225/110	148	468	226	32,1
200/125	225/140	175	495	244	34,9
200/150	225/160	193	520	256	31,0
200/200	225/225	260	542	261	29,0
250/ 80	250/ 90	215	547	241	50,4
250/100	250/110	180	542	234	45,0
250/150	250/160	205	584	266	47,8
250/200	250/200	250	634	268	51,9
250/250	250/250	280	665	332	64,4
250/ 80	280/ 90	142	547	256	46,3
250/100	280/110	180	547	269	49,8
250/150	280/160	205	688	295	60,2
250/200	280/225	304	688	325	53,9
250/250	280/280	314	688	359	54,8

DN	Maße in mm · dimensions in mm				kg/Stück kg/piece
	d1/d2	Z	A	I	
300/ 80	315/ 90	154	642	277	69,1
300/100	315/110	172	642	288	66,8
300/150	315/160	217	642	308	54,8
300/200	315/225	270	677	331	63,2
300/250	315/280	310	727	362	64,1
300/300	315/315	350	756	379	70,9
400/200	400/225	404	812	368	95,3
400/300	400/315	485	893	416	111,5
500/200	500/225	424	902	418	144,6

Werkstoff: duktiles Gusseisen

Normalausführung: EWS beschichtet

Material: ductile cast iron

Standard: EWS (fusion bonded epoxy) coating